netleo

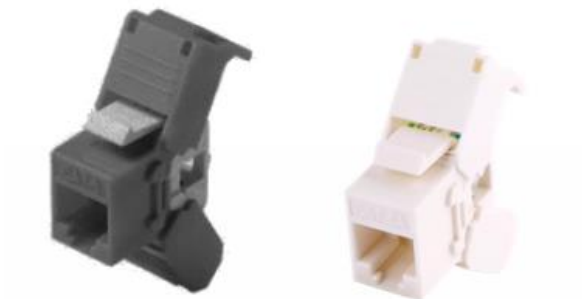

Inserto RJ-45 Cat 6 UTP Keystone

Il connettore RJ-45 Cat 6 UTP classe E ad 8 postazione termina con un cavo a 4 coppie intrecciate 22-26 AWG, 100 ohm toolless. Lo strumento opzionale assicura che i conduttori siano completamente chiusi. L'etichettatura universale dev'essere codificata a colori secondo gli schemi di cablaggio T658A e T568B.

Inserto RJ-45 Cat 6 Non schermato Keystone:

Part Number	Description	Type
5602409	UTP Cat.6 180-degree & 90-degree Keystone Jack - Toolless - Black color	UTP
5602415	UTP Cat.6 180-degree & 90-degree Keystone Jack - Toolless - White color	UTP

Garanzia di prodotto

I connettori Keystone di Netleo sono coperti dalla garanzia **36 mesi** per i difetti di conformità ai sensi del D.lgs. n. 24/02.
La garanzia di Sistema permette l'estensione fino a **30 anni** nel caso la soluzione venga posata in un impianto con tutti i prodotti passivi a marchio Netleo da installatori certificati Netleo.

I connettori RJ45 di Netleo rispettano la direttiva europea RoHS 2002/95/EC relativa al contenuto di sostanze pericolose. *Restriction of the Use of Certain Hazardous Substance in Electrical and Electronic Equipment.*

RoHS COMPLIANT

30 anni Garanzia di Sistema

3 anni Garanzia di Prodotto

Inserto RJ-45 Cat 6 UTP Keystone

Technical information	
Environmental Space	Indoor
Suitable Applications	TIA Category 6, ISO Class E, 1000 BASE-T
Height	21mm
Widht	16.3mm
Depth	34mm
Wiring Scheme	T568A/B
Packaging	Individually packaged in a plastic bag
Weight	10g
Front Connection	Copper Allow with 15 µ inch Gold over Nickel - Lead Frame
Rear Connection	Copper Allow with Nickel Plating - IDC
Connector Body	Plastic - UL940V-0 - Housing
Dielectric Strength	1,000V RMS @ 60 Hz for 1 minute
Current Rating	1.500(A)
Insulation Resistance	500 M-Ohm Minimum
Max Contact Resistance	20(mOhm)
Termination Resistance	2.5 m-Ohm
Storage Temp Range	-40°C to +70°C
Installation Temp Range	-10°C to +60°C
Operating Temp Range	-10°C to +60°C
Footprint/Type	KeyConnect
Plug/Jack Compatibility	RJ45
Termination Front Connection	Mated Connection
Termination Front Connection Durabil	1,000 cycles
Termination Rear Connection	Gas Tight IDC Connection
Termination Rear Connection Durabil	50 Terminations
Connector/Hardware Retention	20(lbs)
Plug/Connector Retention	11.250(lbs)
Tool Compatibility	Toolless
Included Parts	1 wiring cap; difference color possible for housing